





Ferrite Cores

Bead Cores HBB TYPE

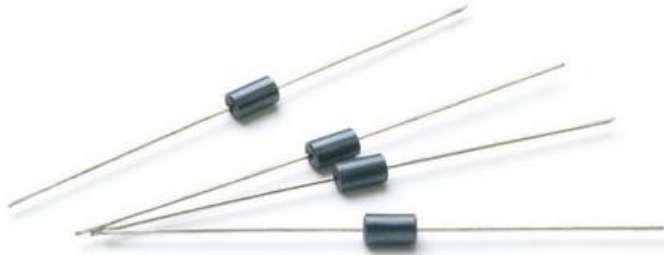

NO	Specifications	Dimensions:mm			Impedance (Ω)min	
		ΦA	B	ΦC	25MHz	100MHz
1	HBB 2.5X1.5X0.65	2.5±0.15	1.5±0.15	0.65	5	20
2	HBB 2.5X3X0.65	2.5±0.15	3 ± 0.2	0.65	8	25
3	HBB 2.5X4X0.65	2.5±0.15	4±0.2	0.65	12	32
4	HBB 2.5X7X0.65	2.5±0.15	7±0.3	0.65	20	58
5	HBB 3.5X3X0.65	3.5±0.2	3±0.2	0.65	13	65
6	HBB 3.5X3X0.65	3.5±0.2	3±0.2	0.65	13	65
7	HBB 3.5X4.5X0.65	3.5±0.2	4.5±0.2	0.65	20	45
8	HBB 3.5X4.7X0.65	3.5±0.2	4.7±0.2	0.65	20	45
9	HBB 3.5X5X0.65	3.5±0.2	5±0.2	0.65	20	50
10	HBB 3.5X6X0.65	3.5±0.2	6±0.2	0.65	20	80
11	HBB 3.5X6X0.65	3.5±0.2	6±0.2	0.65	25	65
12	HBB 3.5X7.8X0.65	3.5±0.2	7.8±0.3	0.65	28	90
13	HBB 3.5X7.8X0.65	3.5±0.2	7.8 ± 0.3	0.65	30	75
14	HBB 3.5X8.3X0.65	3.5±0.2	8.3±0.3	0.65	30	100
15	HBB 3.5X9X0.65	3.5±0.2	9±0.4	0.65	60	100
16	HBB 3.5X9X0.65	3.5±0.2	9±0.4	0.65	50	58
17	HBB 3.5X11.5X0.65	3.5±0.2	11.5 ± 0.5	0.65	45	130
18	HBB 3.5X12X0.65	3.5±0.2	12±0.2	0.65	45	145
19	HBB 3.5X14X0.65	3.5±0.2	14 ± 0.5	0.65	60	150
20	HBB 3.5X4.5X0.65	3.5±0.2	4.5±0.2	0.65	45	45
21	HBB 8X10X0.65	8±0.3	10 ± 0.4	0.65	50	130

The data is reference only. Customers should verify actual device performance in their specific applications. Specifications are subject to change without notice. Please check our website for latest information. <http://www.ftind.com>